
BASIC-BO

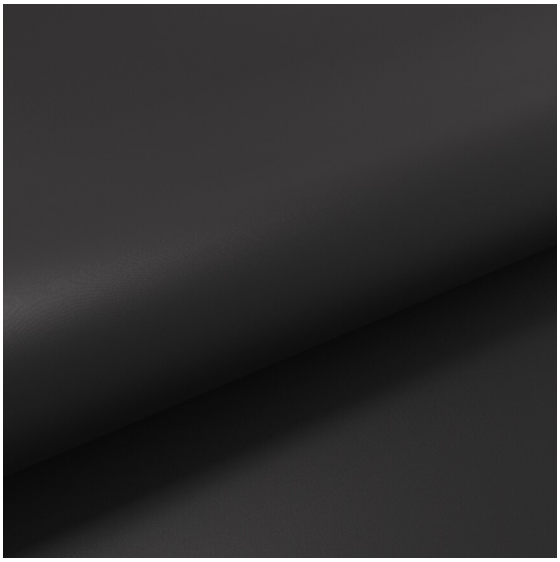

This PVC black-out fabric offers ultimate darkness and privacy, perfect for everyday use. Available with the same neutral color on both sides, these flame-retardant fabrics are suitable for moist conditions.

Physical properties


Composition	75% PVC - 25% GF
Type of finish/coating	No finish / coating
Thickness	0.38 mm
Weight	526 g/m2
Openess factor	0 %
Coloring	Other
Weave type	Plain
Threads warp solid	17.3 p/cm
Threads weft solid	12.5 p/cm
Yarn composition warp solid	Filament
Yarn composition weft solid	Filament
Available roll widths (cm)	183 244 300

Handling

Welding	Possible without tape/with welding tape V22-10(-A)
Applicability	Panel, Roller
Processing	Cold cut, Ultrasonic cut
Processing direction	Drop for drop
Cleaning	Damp cloth, Dry cloth
Printable	Yes


Certification data

Color fastness standard	ISO 105-B02
Color fastness value	6
Flame retardant	Yes
Flame retardant standard	EN 13773, NFPA 701
Phthalate free	No
Lead-free	No
Moisture proof	Yes
Recyclable	No
Zero VOC	No
Oeko-Tex standard	No
Greenguard certification	No
Greenguard gold certification	No
Anti microbial	No
Formaldehyde free	No




Collections

01




02

03



04



05



06

RTA Specifications

		Thermal comfort										Visual comfort								
Article color code	Color	Ts	Rs	As	T-UV	Gtot int glazing C Value	Gtot int glazing C Class	FC glazing C Value	Gtot int glazing D Value	Gtot int glazing D Class	FC glazing D Value	Rv	Tv	Av	Tv, n-h	Tv, n-diff	Glare control Class	Privacy night Class	Visual contact Class	Daylight utilisation Class
01	White	0,0001	0,6617	0,3383	0	0,35	2	0,6	0,25	2	0,78	0,7879	0	0,2121	0	0	4	4	0	0
02	Champ. Beige	0	0,618	0,382	0	0,37	1	0,62	0,25	2	0,79	0,6662	0	0,3338	0	0	4	4	0	0
03	Fawn	0,0001	0,6814	0,3185	0	0,35	2	0,59	0,25	2	0,77	0,774	0	0,226	0	0	4	4	0	0
04	Grey	0	0,4534	0,5466	0	0,42	1	0,71	0,27	2	0,84	0,4977	0	0,5023	0	0	4	4	0	0
05	Stone	0	0,232	0,768		0,49	1	0,83	0,29	2	0,91	0,251	0	0,749	0	0	4	4	0	0
06	Black	0	0,0483	0,9516	0	0,55	0	0,93	0,3	2	0,95	0,049	0	0,951	0	0	4	4	0	0

Article color codes are subjected to availability of their respective product types. Please consult the webshop on My Coulisse for current supply.
The following regulations apply to the values listed in the table:

- Reflection, Transmission and Absorbtion — EN 410:2011
- Gtot int glazing — EN 52022-1
- Visual comfort classifications — EN 14501:2021
- FC value — EN 13363-1

The information in this productsheet is for guidance only and is based on information available at the time of publication. We want to emphasize that it is important to always consult the most recent product specifications for specific and detailed information about our range. Although this collection book has been compiled with the utmost care, we cannot guarantee the completeness, accuracy or timeliness of the information. Use of this information is entirely at the user's own risk. We accept no liability for any direct or indirect damages resulting from the use of this information.

If you have any questions about our products, please do not hesitate to contact us. Our team of experts is ready to help and inform you about our products and their specifications.

About Coulisse

We are a down-to-earth family run business founded in the Netherlands, built on strong partnerships. Working with and for passionate people to create the most forward-thinking window covering solutions for the industry worldwide. With our in-house engineers, quality department, R&D, creative marketing and e-business teams, we go above and beyond for our clients.

Contact us

EMEA
Vonderweg 48
7468 DC Enter
The Netherlands

Americas
2400 NW 116th St Suite 600
Miami FL 33167
United States

APAC
Unit 17/69 O'Riordan Street
Alexandria NSW 2015 Sydney
Australia

COULISSE
since 1992