CERTIFICATES	
CE standard	CM-09-MC
ETL standard	CM-09-MC120

Label sticker:

MODEL	INPUT	TORQUE	SPEED	OPERATING TIME	
CM-09-MC TUBULAR MOTOR	230V~50HZ 0.53A 121W	6 NM	28 RPM	4 MIN	I.CL.H

Motionblinds

IP 44


Coulisse B.V. Vonderweg 48, 7468 DC Enter, The Netherlands

MODEL	INPUT	TORQUE	SPEED	OPERATING TIME	
CM-09-MC120 TUBULAR MOTOR	120V~60HZ 0.85A 102W	6 NM	33 RPM	4 MIN	I.CL.B


Motionblinds

IP 44 c US

Coulisse B.V. Vonderweg 48, 7468 DC Enter, The Netherlands



2 meter cable

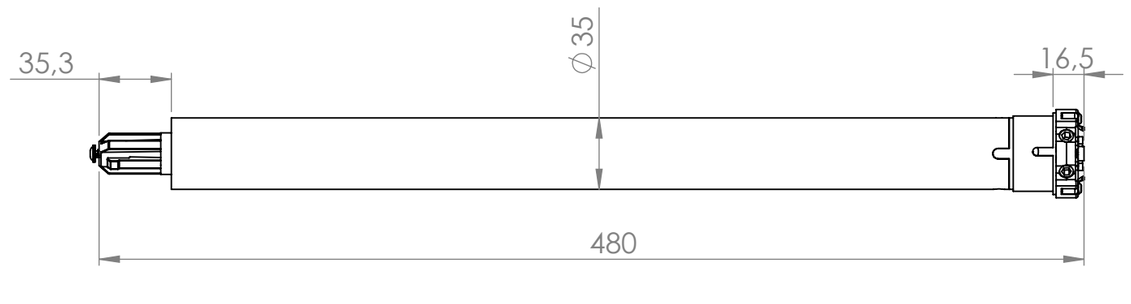

Cable type:	
CM-09-MC	H05VV-F 4G (0,75 mm2)
CM-09-MC120	18AWG (0,824mm2) X4C

Art.code: CM-09-MC(120)	..-MC	-MC120
max torque full battery (Nm)	6	6
power supply	230 V / 50 Hz	120 V / 60 Hz
speed (rpm)	28	33
(EN13120 class2) life cycle time guaranteed (cycles)	10.000	10.000
Motor weight (grams)	1360	1360

CUSTOMER DRAWING

Article Nr.: CM-09-MC

Description:
Tubular motor mechanical 35 mm

Projection

coulisse

Material:
Material <not specified>

Weight (approximately):

Customer drawing: not for production

Revision 13

A3

SCALE: 1:3

Drawing Nr.: 00045158

© Copyright Coulisse 2016